



FALCOSLIM	
Part code	Description
00.500.000	start/end post, profile 100x50 mm on base plate 200x100 mm
00.501.000	intermediary post, profile 100x50 mm on base plate 200x100 mm
00.502.000	end support suitable for wall mounting
00.504.000	intermediate support suitable for wall mounting
00.505.000	cross bar, length 300 cm
00.505.010	cross bar, up to a length of 150 cm
00.505.020	cross bar, up to a length of 299 cm
00.509.000	support for handlebar with protection plastic, distance between places is flexible

**FALCOSLIM**


The FalcoSlim is a great option to all those cycle racks which clutter the floor collecting leaves and rubbish. The design suspends the cycle by the handle bars so that the front wheel is not clamped with the potential for distortion.

Suspended from two bolt down uprights, the box section cross member houses a number of handle bar supports, which have two features; first a profiled hole in them for passing the cycle lock through and second a rubber sheathing to protect the handle bars.

**1 FALCOSLIM SINGLE SIDED**

The single sided version is available with two standard size cross members of 150mm and 300mm plus a variable one up to 299mm so that the system can be made bespoke to your space availability. As well as the standard floor mounted version, the single sided FalcoSlim is also available as a wall mounted option using wall supports – ask our technical sales staff for details.

**FalcoSlim, single sided**

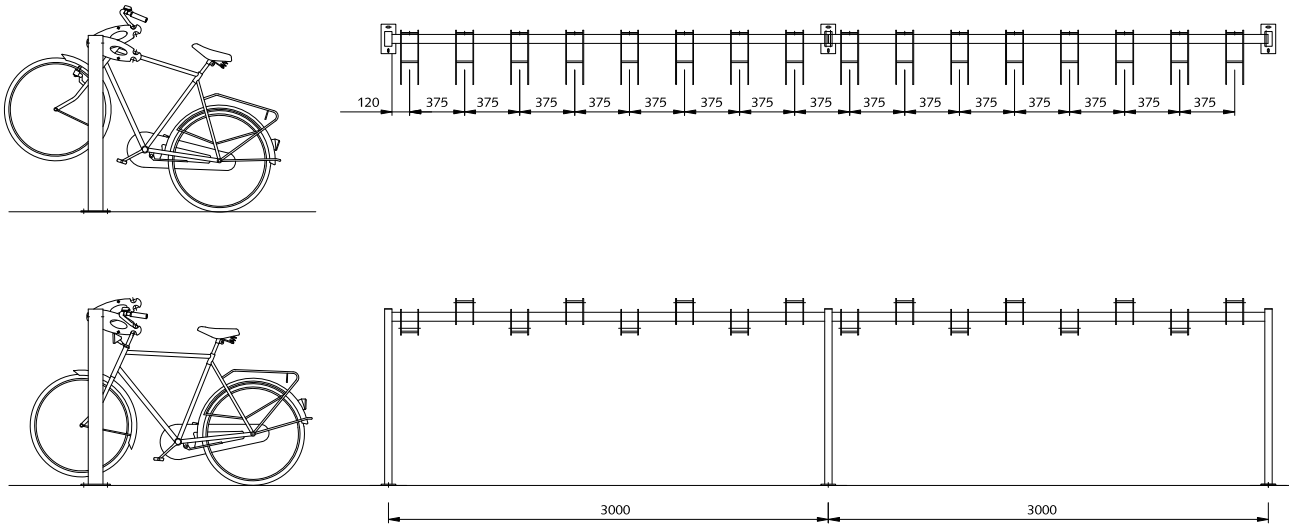

## 2 FALCOSLIM DOUBLE SIDED

This model has a high-low system so that the available space is used to maximum effect. The distance between the handlebar hooks is not pre-determined, so can be set to suit its' surroundings.

The hook upon which the handlebar rests is provided with a plastic cover to prevent scratches. Whereas the hook can be mounted variable, the cross bar can also be used double-sided.

Up to 8 bicycles can be hung single-sided over a length of 3,000 mm and 15 bicycles double-sidedly!

The hooks for the handlebars are pushed over the cross-bar and then fixed with a bolt.

The cross-bar will be mounted between two columns which can be fixed to the ground with base plates.

The cross bar has got a profile of 60x60 mm and is available up to a length of 3,000 mm.

The columns have a profile of 100x50 mm with a base plate of 200x100 mm on ground level.

All steel parts are hot dip galvanised according to the standard EN-ISO 1461.

The steel parts can be powdercoated, but we do not recommend the cross-bar to be powdercoated because of the slidable hooks.

### FalcoSlim, double sided

